



Asta
Pendant

Pendelleuchten I

Pendant

Asta Pendant

LED Downlight

Kardan Square

HIGH CRI >90Ra
FASHION modules
FOOD modules

AVAILABLE ON REQUEST




Up to 3*42W
Up to 6090lm
3000K 4000K

Power Lumen CCT

CE
RoHS
30°
360°
House icon
IP 20
0.8m
III
F

| | | | | | |
|---------------------|---------------------|--|---------|---------|---------|
| Product Information | LED Power | 26W | | 42W | |
| | CRI | >80Ra | | | |
| | CCT | 3000K | 4000K | 3000K | 4000K |
| | LED Lumen | 3640lm | 3790lm | 5770lm | 6090lm |
| | LED Efficacy | 140lm/W | 146lm/W | 137lm/W | 145lm/W |
| | LOR | Up to 85% | | | |
| | Driver | Non-Dimmable Driver (included in downlight module) | | | |
| | Reflector | | | | |

* Product Information per spot head.



Downlight Module: driver, epcom/2 connection and fixture




Ceiling Box for driver (not included)



Ceiling Mounting Set (included)

| On Request | Article No. | Description | Article No. | Description |
|------------|-------------|--------------------------------------|-------------|--------------------------------------|
| | S5.14.0153 | Reflector 18° for LED Downlight Asta | - | Dimmable driver available on request |
| | S5.14.0154 | Reflector 28° for LED Downlight Asta | | |
| | S5.14.0156 | Reflector 60° for LED Downlight Asta | | |

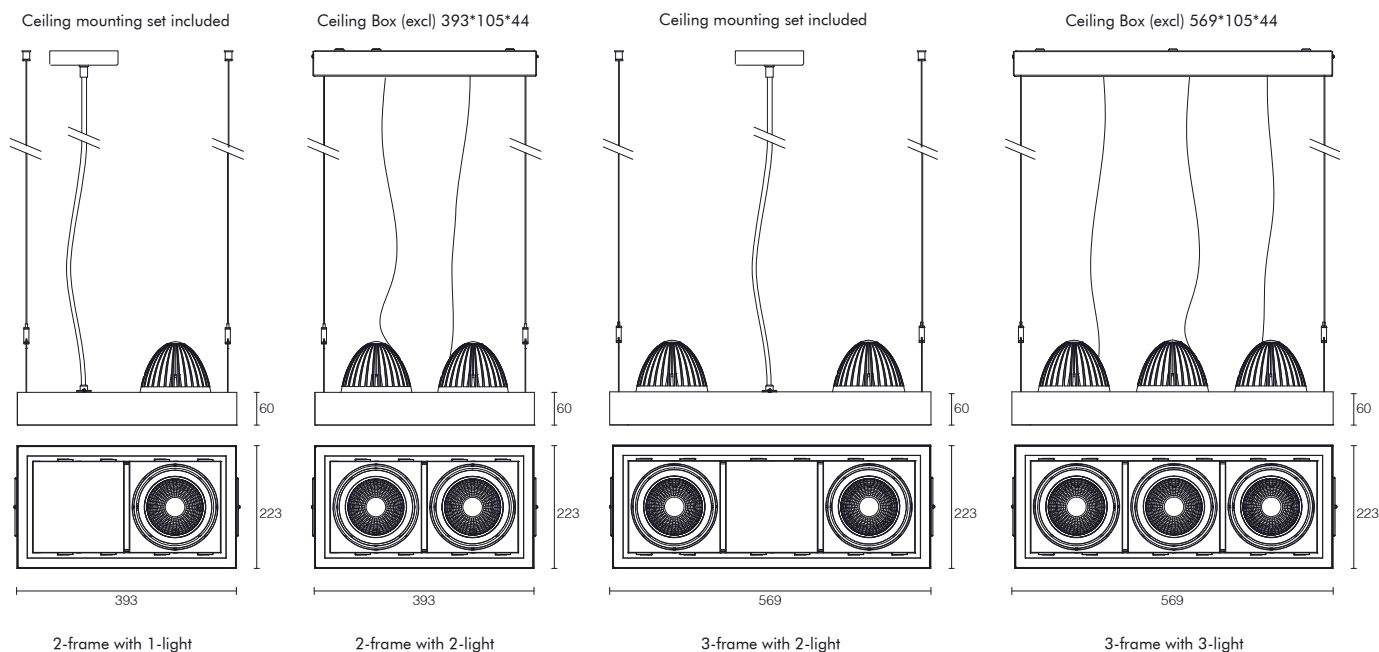

| Article No. | Product Name | Color | LED Lumen | CCT | CRI | Cooling | LED Power | Reflector |
|-----------------------|------------------------------|-------|---------------------|-------------|-------|---------|-----------|-----------|
| S2.06.0463/S2.06.0464 | Pendant Asta 2-frame 1-light | Grey | 3640lm/3790lm | 3000K/4000K | >80Ra | Passive | 26W | 38° |
| S2.06.0469/S2.06.0470 | Pendant Asta 2-frame 1-light | White | 3640lm/3790lm | 3000K/4000K | >80Ra | Passive | 26W | 38° |
| S2.06.0475/S2.06.0476 | Pendant Asta 2-frame 1-light | Black | 3640lm/3790lm | 3000K/4000K | >80Ra | Passive | 26W | 38° |
| S2.06.0466/S2.06.0467 | Pendant Asta 2-frame 1-light | Grey | 5770lm/6090lm | 3000K/4000K | >80Ra | Passive | 42W | 38° |
| S2.06.0472/S2.06.0473 | Pendant Asta 2-frame 1-light | White | 5770lm/6090lm | 3000K/4000K | >80Ra | Passive | 42W | 38° |
| S2.06.0478/S2.06.0479 | Pendant Asta 2-frame 1-light | Black | 5770lm/6090lm | 3000K/4000K | >80Ra | Passive | 42W | 38° |
| S2.06.0481/S2.06.0482 | Pendant Asta 2-frame 2-light | Grey | 2* 3640lm/2* 3790lm | 3000K/4000K | >80Ra | Passive | 2* 26W | 38° |
| S2.06.0487/S2.06.0488 | Pendant Asta 2-frame 2-light | White | 2* 3640lm/2* 3790lm | 3000K/4000K | >80Ra | Passive | 2* 26W | 38° |
| S2.06.0493/S2.06.0494 | Pendant Asta 2-frame 2-light | Black | 2* 3640lm/2* 3790lm | 3000K/4000K | >80Ra | Passive | 2* 26W | 38° |
| S2.06.0484/S2.06.0485 | Pendant Asta 2-frame 2-light | Grey | 2* 5770lm/2* 6090lm | 3000K/4000K | >80Ra | Passive | 2* 42W | 38° |
| S2.06.0490/S2.06.0491 | Pendant Asta 2-frame 2-light | White | 2* 5770lm/2* 6090lm | 3000K/4000K | >80Ra | Passive | 2* 42W | 38° |
| S2.06.0496/S2.06.0497 | Pendant Asta 2-frame 2-light | Black | 2* 5770lm/2* 6090lm | 3000K/4000K | >80Ra | Passive | 2* 42W | 38° |
| S2.06.0499/S2.06.0500 | Pendant Asta 3-frame 2-light | Grey | 2* 3640lm/2* 3790lm | 3000K/4000K | >80Ra | Passive | 2* 26W | 38° |
| S2.06.0505/S2.06.0506 | Pendant Asta 3-frame 2-light | White | 2* 3640lm/2* 3790lm | 3000K/4000K | >80Ra | Passive | 2* 26W | 38° |
| S2.06.0511/S2.06.0512 | Pendant Asta 3-frame 2-light | Black | 2* 3640lm/2* 3790lm | 3000K/4000K | >80Ra | Passive | 2* 26W | 38° |
| S2.06.0502/S2.06.0503 | Pendant Asta 3-frame 2-light | Grey | 2* 5770lm/2* 6090lm | 3000K/4000K | >80Ra | Passive | 2* 42W | 38° |
| S2.06.0508/S2.06.0509 | Pendant Asta 3-frame 2-light | White | 2* 5770lm/2* 6090lm | 3000K/4000K | >80Ra | Passive | 2* 42W | 38° |
| S2.06.0514/S2.06.0515 | Pendant Asta 3-frame 2-light | Black | 2* 5770lm/2* 6090lm | 3000K/4000K | >80Ra | Passive | 2* 42W | 38° |
| S2.06.0517/S2.06.0518 | Pendant Asta 3-frame 3-light | Grey | 3* 3640lm/3* 3790lm | 3000K/4000K | >80Ra | Passive | 3* 26W | 38° |
| S2.06.0523/S2.06.0524 | Pendant Asta 3-frame 3-light | White | 3* 3640lm/3* 3790lm | 3000K/4000K | >80Ra | Passive | 3* 26W | 38° |
| S2.06.0529/S2.06.0530 | Pendant Asta 3-frame 3-light | Black | 3* 3640lm/3* 3790lm | 3000K/4000K | >80Ra | Passive | 3* 26W | 38° |
| S2.06.0520/S2.06.0521 | Pendant Asta 3-frame 3-light | Grey | 3* 5770lm/3* 6090lm | 3000K/4000K | >80Ra | Passive | 3* 42W | 38° |
| S2.06.0526/S2.06.0527 | Pendant Asta 3-frame 3-light | White | 3* 5770lm/3* 6090lm | 3000K/4000K | >80Ra | Passive | 3* 42W | 38° |
| S2.06.0532/S2.06.0533 | Pendant Asta 3-frame 3-light | Black | 3* 5770lm/3* 6090lm | 3000K/4000K | >80Ra | Passive | 3* 42W | 38° |

Vide

Pendant

LED



20W

Power



Up to
1400lm

Lumen



2700K
3000K
4000K




CCT



RoHS



Product Information

| | | | |
|------------------|--|--|--|
| Power | 20W | | |
| CRI | >95Ra | | >90Ra |
| CCT | 2700K | 3000K | 4000K |
| Lumen | 1300lm | 1350lm | 1400lm |
| LOR | >85% | | |
| Driver | 500mA Dimmable Driver (included) | | |
| Reflector |  15° |  25° |  40° included |



System includes: fixture and driver




Pendant mounting set, cable length 1,5m (Included)






On Request

| Article No. | Description | Article No. | Description |
|-------------|------------------------|-------------|---------------------|
| S5.14.0210 | Reflector 15° for Vide | S2.01.0927 | Gold ring for Vide |
| S5.14.0211 | Reflector 25° for Vide | S2.01.0928 | Grey ring for Vide |
| | | S2.01.0929 | White ring for Vide |
| | | S2.01.0930 | Black ring for Vide |

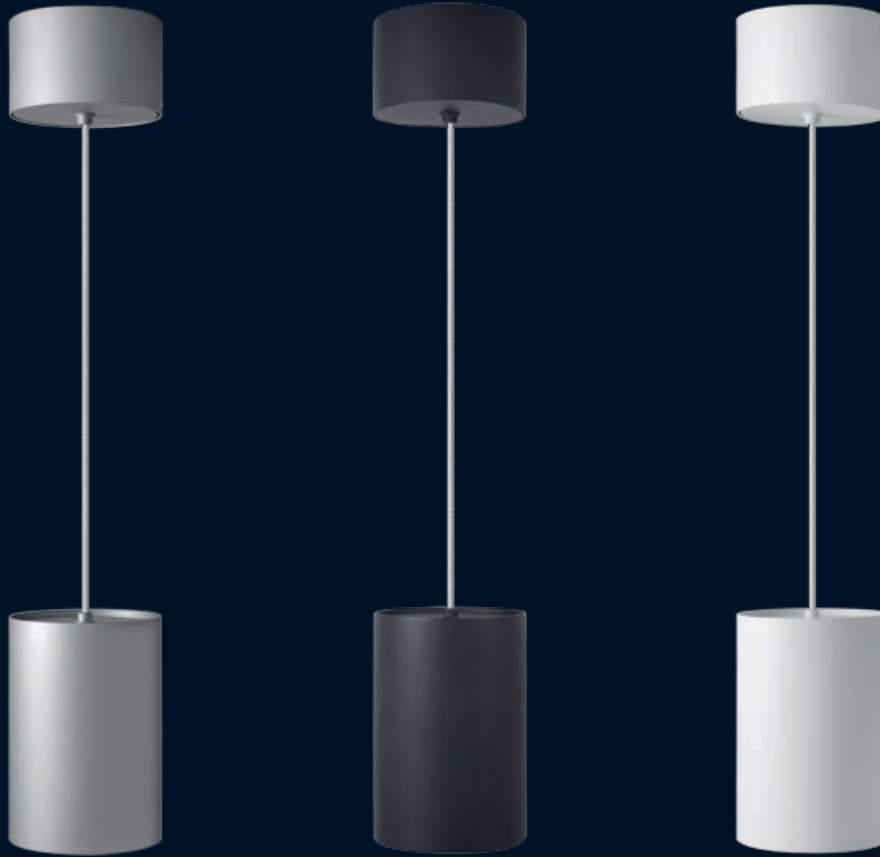

Vide 3000K

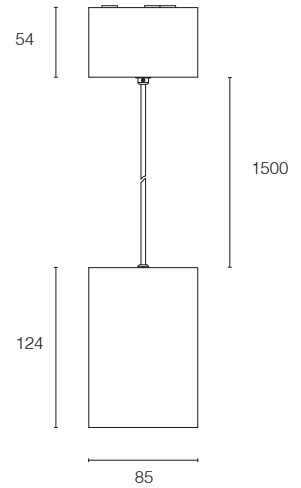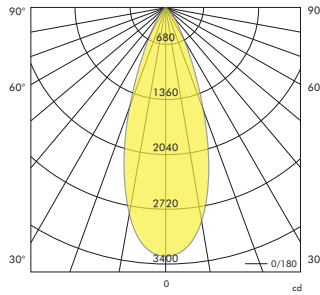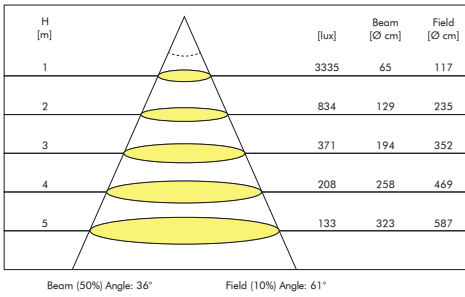

| Article No. | Product Name | Lumen | Housing Color | Ring Color | CCT | CRI | Cooling | Power | Reflector |
|-------------|-----------------------|--------|---------------|------------|-------|-------|---------|-------|-----------|
| S2.06.0353 | Pendant LED spot Vide | 1300lm | Grey | Grey | 2700K | >95Ra | Passive | 20W | 40° |
| S2.06.0356 | Pendant LED spot Vide | 1350lm | Grey | Grey | 3000K | >95Ra | Passive | 20W | 40° |
| S2.06.0359 | Pendant LED spot Vide | 1400lm | Grey | Grey | 4000K | >90Ra | Passive | 20W | 40° |
| S2.06.0398 | Pendant LED spot Vide | 1300lm | White | White | 2700K | >95Ra | Passive | 20W | 40° |
| S2.06.0401 | Pendant LED spot Vide | 1350lm | White | White | 3000K | >95Ra | Passive | 20W | 40° |
| S2.06.0404 | Pendant LED spot Vide | 1400lm | White | White | 4000K | >90Ra | Passive | 20W | 40° |
| S2.06.0443 | Pendant LED spot Vide | 1300lm | Black | Black | 2700K | >95Ra | Passive | 20W | 40° |
| S2.06.0446 | Pendant LED spot Vide | 1350lm | Black | Black | 3000K | >95Ra | Passive | 20W | 40° |
| S2.06.0449 | Pendant LED spot Vide | 1400lm | Black | Black | 4000K | >90Ra | Passive | 20W | 40° |

Product List

Ono LED

Pendant

LED

HIGH CRI
>90Ra

FASHION
modules

FOOD
modules

AVAILABLE ON REQUEST



Up to
42W
Power


Up to
6090lm
Lumen

3000K
4000K
CCT




Product Information

| LED Power | 26W | | 42W | |
|--------------|--|---------|---------|---------|
| CRI | >80Ra | | | |
| CCT | 3000K | 4000K | 3000K | 4000K |
| LED Lumen | 3640lm | 3790lm | 5770lm | 6090lm |
| LED Efficacy | 140lm/W | 146lm/W | 137lm/W | 145lm/W |
| Driver | Non-Dimmable Driver (included) | | | |
| Reflector | 80° (not included) | | | |
| Accessories | Pendant set (including 3m cable, steel cable and ceiling mounting cap) | | | |



System includes: fixture with integrated driver and 3m cable

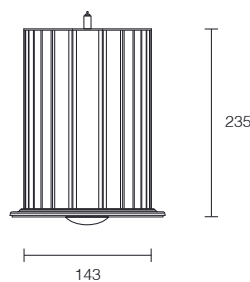

Pendant mounting set, cable length 3m (Included)

Product List

| Article No. | Product Name | Color | Lumen | CCT | CRI | Cooling | Power | Reflector (not included) |
|-------------|--------------|-------|--------|-------|-------|---------|-------|--------------------------|
| S2.06.0326 | Ono LED 26W | Grey | 3640lm | 3000K | >80Ra | Passive | 26W | 80° |
| S2.06.0327 | Ono LED 26W | Black | 3640lm | 3000K | >80Ra | Passive | 26W | 80° |
| S2.06.0328 | Ono LED 26W | Grey | 3790lm | 4000K | >80Ra | Passive | 26W | 80° |
| S2.06.0329 | Ono LED 26W | Black | 3790lm | 4000K | >80Ra | Passive | 26W | 80° |
| S2.06.0330 | Ono LED 42W | Grey | 5770lm | 3000K | >80Ra | Passive | 42W | 80° |
| S2.06.0331 | Ono LED 42W | Black | 5770lm | 3000K | >80Ra | Passive | 42W | 80° |
| S2.06.0332 | Ono LED 42W | Grey | 6090lm | 4000K | >80Ra | Passive | 42W | 80° |
| S2.06.0333 | Ono LED 42W | Black | 6090lm | 4000K | >80Ra | Passive | 42W | 80° |

Reflectors for Ono LED



Cover PC 315mm
needs adaptor plate
(not included)



Cover PC 406mm



Cover PC 536mm



Cover Anodised 418mm



Cover Black 418mm

Reflector for Ono LED

| Article No. | Product Name | Material | Size (Diameter, Height) |
|-------------|--|---------------|-------------------------|
| S8.03.0623 | Cover 315mm transparent | Polycarbonate | D:315, H:192 |
| S2.01.0956 | Adaptor plate for cover 315mm - grey finish | | |
| S2.01.0957 | Adaptor plate for cover 315mm - black finish | | |
| S8.03.0629 | Cover 406mm transparent | Polycarbonate | D:410, H:277 |
| S5.14.0032 | Cover 536mm transparent | Polycarbonate | D:542, H:320 |
| S5.14.0197 | Reflector Aluminium 38° with anodised finish | Aluminium | D:418, H:280 |
| S5.14.0198 | Reflector Aluminium 38° with black finish | Aluminium | D:418, H:280 |

High Bay Cap

Pendant

LED



150W High Bay Cap
in combination with 80° Reflector Alu.




Product Information


| | | |
|---------------------|----------------------------------|---------|
| System Power | 165W | 220W |
| CRI | >70Ra | |
| CCT | 5500K | |
| Lumen | 14000lm | 19000lm |
| Driver | Non-Dimmable Driver (included) | |
| Reflector | 80° / 100° / 120° (not included) | |
| Weight | 7KG | 8KG |




2.01.0723 Frosted PC Light Source Cover
D: 50mm (not included)

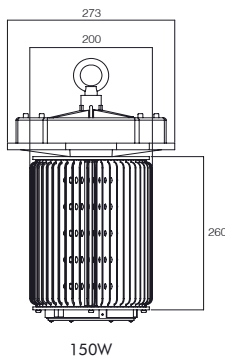

150W

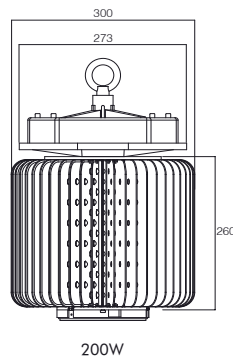

200W

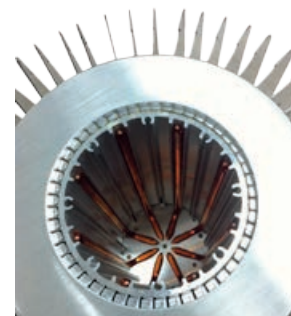


Heat Pipe Technology Cooling System


Product List

| Article No. | Product Name | Lumen | CCT | CRI | Cooling | LED Power | Reflector (not included) |
|-------------|-------------------------------------|---------|-------|-------|---------|-----------|--------------------------|
| S2.06.0304 | High Bay Cap 150W without reflector | 14000lm | 5500K | >70Ra | Passive | 150W | 80° / 100° / 120° |
| S2.06.0305 | High Bay Cap 200W without reflector | 19000lm | 5500K | >70Ra | Passive | 200W | 80° / 100° / 120° |


Reflectors for High Bay Cap

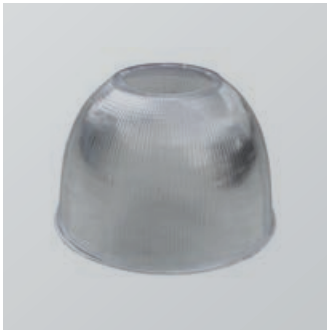


Reflector PC 80°

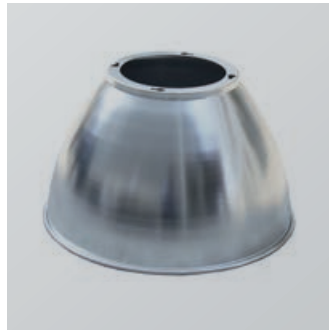





Reflector Alu. 80°

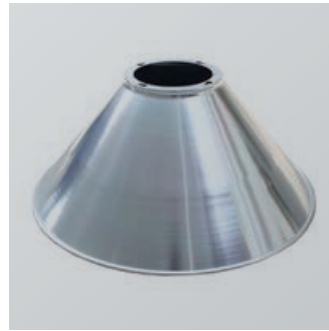

Reflector Alu. 100°

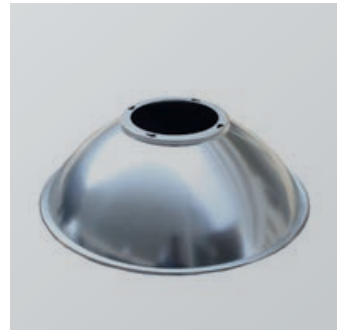



Reflector Alu. 120°

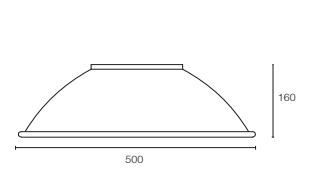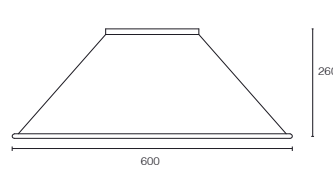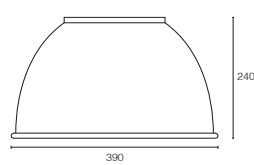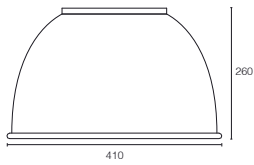

High Bay Cap 150W 80° reflector

| H [m] | [lux] | Beam [Ø cm] | Field [Ø cm] |
|-------|-------|-------------|--------------|
| 2 | 4313 | 180 | 370 |
| 4 | 853 | 350 | 750 |
| 6 | 379 | 530 | 1120 |
| 8 | 213 | 710 | 1490 |
| 10 | 137 | 880 | 1870 |



Beam (50%) Angle: 48° Field (10%) Angle: 86°

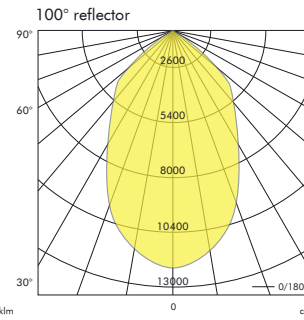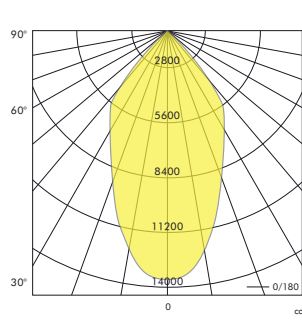

High Bay Cap 200W 80° reflector

| H [m] | [lux] | Beam [Ø cm] | Field [Ø cm] |
|-------|-------|-------------|--------------|
| 2 | 4770 | 190 | 370 |
| 4 | 1193 | 380 | 750 |
| 6 | 530 | 570 | 1120 |
| 8 | 298 | 760 | 1490 |
| 10 | 191 | 950 | 1870 |

Beam (50%) Angle: 51° Field (10%) Angle: 86°

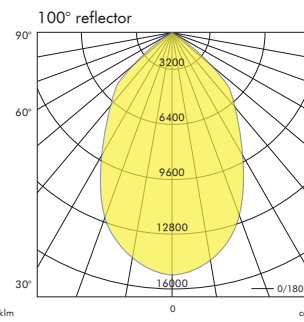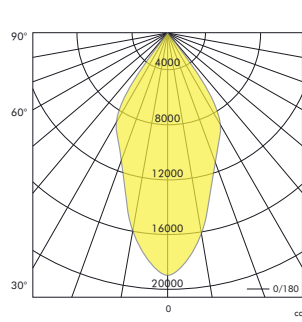

Reflector for High Bay Cap

| Article No. | Product Name | Material | Size (Diameter, Height) | Reflector angle |
|-------------|---|---------------|-------------------------|-----------------|
| S5.14.0088 | Reflector PC 80° for High Bay Cap | Polycarbonate | D:410, H:260 | 80° |
| S5.14.0089 | Reflector aluminium 80° for High Bay Cap | Aluminium | D:390, H:240 | 80° |
| S5.14.0090 | Reflector aluminium 100° for High Bay Cap | Aluminium | D:600, H:260 | 100° |
| S5.14.0091 | Reflector aluminium 120° for High Bay Cap | Aluminium | D:500, H:160 | 120° |

Product List


High Bay Cap Eco

Pendant


LED



High Bay Cap Eco
in combination with 80° Reflector Alu.



Power



Lumen



CCT



RoHS



IP
40




Product Information

| | |
|---------------------|----------------------------------|
| System Power | 110W |
| CRI | >70Ra |
| CCT | 5500K |
| Lumen | 11000lm |
| Driver | Non-Dimmable Driver (included) |
| Reflector | 80° / 100° / 120° (not included) |
| Weight | 6.6KG |




S2.01.0723 Frosted PC Light Source Cover
D: 50mm (not included)

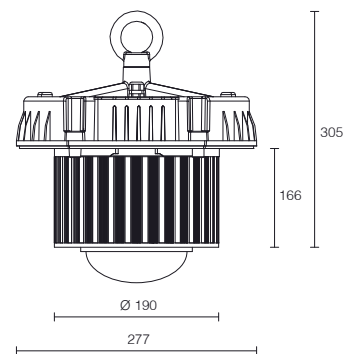


Product List

| Article No. | Product Name | Lumen | CCT | CRI | Cooling | LED Power | Reflector (not included) |
|-------------|---|---------|-------|-------|---------|-----------|--------------------------|
| S2.06.0322 | High Bay Cap Eco 100W without reflector | 11000lm | 5500K | >70Ra | Passive | 100W | 80° / 100° / 120° |


Reflectors for High Bay Cap Eco

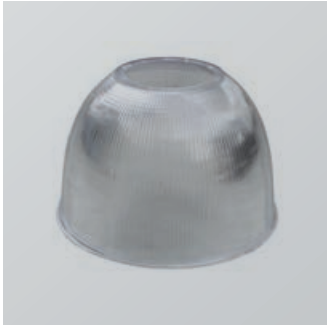


Reflector PC 80°

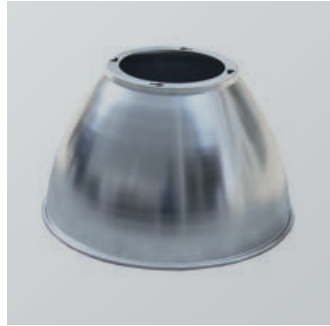





Reflector Alu. 80°

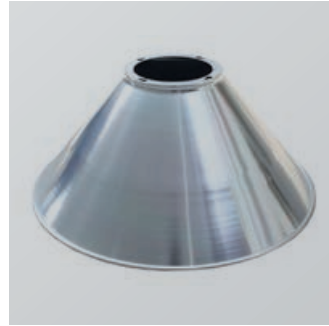

Reflector Alu. 100°

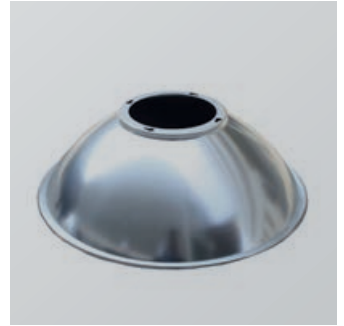


Reflector Alu. 120°

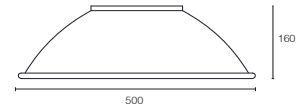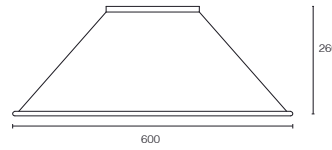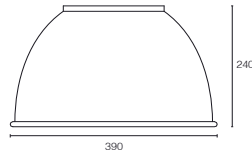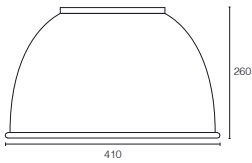

High Bay Cap Eco 100W 80° reflector

| H [m] | [lux] | Beam [Ø cm] | Field [Ø cm] |
|-------|-------|-------------|--------------|
| 2 | 2385 | 190 | 370 |
| 4 | 596 | 380 | 740 |
| 6 | 265 | 570 | 1110 |
| 8 | 149 | 770 | 1500 |
| 10 | 95 | 960 | 1870 |


Beam (50%) Angle: 51° Field (10%) Angle: 86°

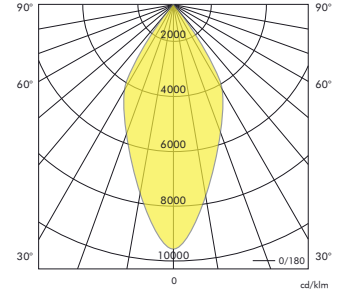

High Bay Cap Eco 100W 100° reflector

| H [m] | [lux] | Beam [Ø cm] | Field [Ø cm] |
|-------|-------|-------------|--------------|
| 2 | 1938 | 250 | 470 |
| 4 | 484 | 490 | 930 |
| 6 | 215 | 740 | 1400 |
| 8 | 121 | 980 | 1870 |
| 10 | 78 | 1230 | 2330 |


Beam (50%) Angle: 63° Field (10%) Angle: 99°

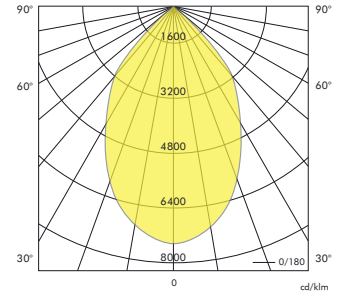

High Bay Cap Eco 100W 120° reflector

| H [m] | [lux] | Beam [Ø cm] | Field [Ø cm] |
|-------|-------|-------------|--------------|
| 2 | 1851 | 230 | 630 |
| 4 | 463 | 460 | 1250 |
| 6 | 206 | 690 | 1880 |
| 8 | 116 | 920 | 2510 |
| 10 | 74 | 1150 | 3130 |

Beam (50%) Angle: 60° Field (10%) Angle: 115°

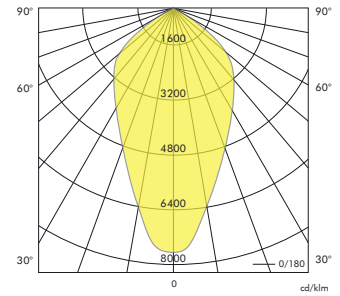

Reflector for High Bay Cap Eco

| Article No. | Product Name | Material | Size (Diameter, Height) | Reflector angle |
|-------------|---|---------------|-------------------------|-----------------|
| S5.14.0088 | Reflector PC 80° for High Bay Cap Eco | Polycarbonate | D:410, H:260 | 80° |
| S5.14.0089 | Reflector aluminium 80° for High Bay Cap Eco | Aluminium | D:390, H:240 | 80° |
| S5.14.0090 | Reflector aluminium 100° for High Bay Cap Eco | Aluminium | D:600, H:260 | 100° |
| S5.14.0091 | Reflector aluminium 120° for High Bay Cap Eco | Aluminium | D:500, H:160 | 120° |

Product List